



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ³ : C07F 7/02		A1	(11) International Publication Number: WO 85/ 02848 (43) International Publication Date: 4 July 1985 (04.07.85)
(21) International Application Number: PCT/US84/02087 (22) International Filing Date: 21 December 1984 (21.12.84) (31) Priority Application Number: 565,460 (32) Priority Date: 27 December 1983 (27.12.83) (33) Priority Country: US		(81) Designated States: AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), DK, FI, GB (European patent), HU, JP, LU (European patent), NL (European patent), NO, SE (European patent). Published With international search report.	
(71) Applicant: THE SCOPAS TECHNOLOGY COMPANY, INC. [US/US]; 60 East 42 Street, New York, NY 10165 (US). (72) Inventors: DEFFEVE, Kenneth, S. ; 115 Prospect Avenue, Princeton, NJ 08540 (US). ROSENBLATT, Aaron, A. ; 32 West 76 Street, New York, NY 10023 (US). (74) Agents: SINDER, Stuart, J. et al.; Kenyon & Kenyon, One Broadway, New York, NY 10004 (US).			

(54) Title: HYDROPHOBIC, CRYSTALLINE, MICROPOROUS SILICEOUS MATERIALS OF REGULAR GEOMETRY

(57) Abstract

New family of crystalline, microporous siliceous materials of regular geometry, which are substantially hydrophobic, and methods for their preparation. Being resistant to water sorption these materials avoid poisoning and occlusion. These minerals typically have the unit cell structure: $\text{Na}_6[(\text{A}102)_{16}(\text{Si}02)_{30}] \cdot 24\text{H}_2\text{O}$.

ORIGINATION OF TECTOSILICATES

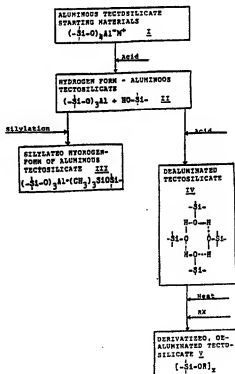


FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.


AT Austria	GA Gabon	MR Mauritania
AU Australia	GB United Kingdom	MW Malawi
BB Barbados	HU Hungary	NL Netherlands
BE Belgium	IT Italy	NO Norway
BG Bulgaria	JP Japan	RO Romania
BR Brazil	KP Democratic People's Republic of Korea	SD Sudan
CF Central African Republic	KR Republic of Korea	SE Sweden
CG Congo	LI Liechtenstein	SN Senegal
CH Switzerland	LK Sri Lanka	SU Soviet Union
CM Cameroon	LU Luxembourg	TD Chad
DE Germany, Federal Republic of	MC Monaco	TG Togo
DK Denmark	MG Madagascar	US United States of America
FI Finland	ML Mali	
FR France		

HYDROPHOBIC, CRYSTALLINE, MICROPOROUS
 SILICEOUS MATERIALS OF REGULAR GEOMETRY

Crystalline, hydrated aluminous tectosilicates of Group
 5 I and Group II elements such as potassium, sodium,
 magnesium and calcium are formed in nature or may be
 synthesized in the laboratory, and higher polyvalent
 ions such as the rare earths are readily introduced by
 cation exchange. Structurally, these tectosilicates are
 10 aluminous "framework" silicates which are based on an
 infinitely extending three-dimensional network of AlO_4
 and SiO_4 tetrahedra which link to each other by sharing
 oxygen ions. Such frameworks or lattices bear net
 negative charges and may be schematically represented by
 15 the general structural formula:



wherein M^+ is a cation such as sodium or potassium and m
 is equal to the number of negatively-charged aluminum
 20 ions within the lattice. The aluminous tectosilicates
 may also be represented by the empirical unit cell
 formula:



wherein M is the cation of valence n , w is the number of
 25 water molecules and the ratio y/x usually is about 1-10,

depending on the structure of the particular tectosilicate involved. The sum $(x + y)$ is the total number of tetrahedra in the unit cell; the portion within the brackets represents the framework composition of the tectosilicate.

After dehydration, some tectosilicates exhibit large internal surface areas which are available to absorb liquids or gases due to the clearing of the channels and pores, which channels uniformly penetrate the entire volume of the solid. The external surface of a tectosilicate represents only a small portion of its total available surface area. Therefore, a dehydrated tectosilicate will selectively sorb or reject different molecules on the basis of their effective molecular sizes and shapes. This size-selective sorption action may be total or partial. If total, the diffusion of one species into the solid may be wholly prevented while the diffusion of a second species occurs. If partial, the components of a binary mixture may diffuse into the solid at different rates, depending on the exposure conditions involved.

Due to the point electric charges on the surfaces of aluminous tectosilicate pores, highly polar molecules such as water, ammonia, alcohols and the like are generally more strongly sorbed than molecules of lower polarity such as hydrocarbons or inert gasses. Water is readily sorbed and tightly bound by aluminous tectosilicates. The water molecules have a strong tendency to cluster in fragments of a diamond-like lattice both in the liquid and in the vapor phase. This hydrophilicity has been exploited to remove water in either the liquid or vapor phase from mixtures of water and molecules such as the hydrocarbons processed by the petroleum industry. Gas streams comprising small readily-sorbed gas molecules such as nitrogen, hydrogen

3

and the like may also be dried with dehydrated tectosilicates due to the tectosilicates' extremely strong attraction for water.

However, aluminous tectosilicate hydrophilicity has
5 prevented the use of these materials to remove selectively less polar substances from mixtures containing water. For example, a tectosilicate which would remove significant quantities of dissolved ammonia from human excreta would find utility in a diaper or bed
10 pad where it would act, at least in part, to prevent ammonia burn and thus to prevent ammonia dermatitis (diaper rash). Such materials would also be useful as a component in litter such as that used to sorb the excreta of farm animals or household pets. Although
15 both naturally-occurring and synthetic tectosilicates have been used to remove nitrogenous components from liquid human and animal wastes through ion exchange, the problem of removing dissolved ammonia in the presence of large amounts of water has not been solved. See
20 Burholder, U.S. Pat. No. 3,935,363. The preferential sorption of water molecules over the ammonia molecules quickly reduces the tectosilicates' ability to sorb ammonia.

The desirability of using tectosilicates as sorbents to
25 remove carbon monoxide from tobacco smoke while permitting larger, flavor-imparting molecules to remain in the smoke has long been recognized. However, the realization of this goal has been effectively thwarted by the preferential sorption of water vapor which is
30 also a component of tobacco smoke and which rapidly fills the tectosilicate pores, thereby preventing the sorption of significant amounts of carbon monoxide. One attempt to prevent this occlusion involves the use of a water-absorbing substance placed in the smoke stream
35 upstream from the tectosilicate, as disclosed in U.S.

Patent No. 3,658,069. Metal catalysts have also been introduced into tectosilicates, for example, to oxidize carbon monoxide to carbon dioxide or to catalyze the hydrogenation and cracking of petroleum feedstocks.

- 5 Such catalyst-supporting tectosilicates are also susceptible to deactivation by water through pore occlusion and catalyst poisoning, for example, see British Pat. No. 2,013,476A.

- 10 A tectosilicate material of hydrophobic character would overcome these poisoning and occlusion problems by being resistant to water sorption while otherwise maintaining affinity and activity for other molecular species. Such hydrophobic tectosilicates would be useful to remove impurities from aqueous feedstocks as well as to protect
15 introduced catalysts from deactivation by water.

Accordingly, it is an object of the present invention to provide a hydrophobic tectosilicate-based material which resists water sorption while retaining a useful affinity for other molecules.

- 20 It is another object of the present invention to provide a hydrophobic tectosilicate-based material that will strongly sorb ammonia while exhibiting a decreased hydrophilicity, preferably a hydrophilicity which is less than the material's power to absorb ammonia.

25 BRIEF DESCRIPTION OF THE INVENTION

- The objects of the present invention have been attained by hydrophobic tectosilicates that are prepared by a reaction sequence that comprises removing a substantial part of the aluminum from the lattice sites of a
30 naturally-occurring or synthetic aluminous tectosilicate so as to create reactive lattice sites, preferably hydroxyl-containing nests of general structure $(\equiv\text{SiOH})_4$

in the siliceous lattice of the tectosilicate. The resultant aluminum-deficient tectosilicates are dehydrated, e.g. by heating them, so as to drive off water of hydration without destroying or otherwise deactivating the reactive sites. The resultant materials are then derivatized so as to substitute selected moieties for the hydroxyl groups, said moieties being weaker point electric sources than aluminum or, preferably, than hydroxyl groups. Selection of the appropriate dealumination, dehydration and derivatization conditions in accord with the present invention results in the production of a new family of hydrophobic materials that are microporous, crystalline and that exhibit a stronger affinity for ammonia than for water under equivalent exposure conditions.

As used herein with respect to a substituent, the term "weaker point electric source" is defined as possessing a lower overall charge and/or which charge is distributed over a larger molecular volume than the charge distribution at, for example: (a) an aluminum site in an aluminous tectosilicate; (b) a hydroxyl site formed as a result of aluminum removal.

DETAILED DESCRIPTION OF THE INVENTION

The hydrophobic materials of the present invention are prepared by reacting lattice silyl hydroxyl groups, preferably those in the tetracoordinate "nest" configuration, so as to substitute organic moieties, preferably acyl, alkyl or silyl groups for the hydroxyl nests. Preferred silyl groups are those of the general formula $\text{Si}(\text{R}')_n \text{X}_p$ wherein n is 0-3, p is (3)-(n), R' is selected from the group consisting of aryl, alkyl, acyl, aralkyl, cycloalkyl and mixtures thereof and X is halogen or an alkoxy group. The preferred acyl, alkoxy and alkyl groups are lower acyl, alkoxy or alkyl

6

radicals such as C_1-C_4 alkyl, alkoxy or acyl groups, both branched and straight chain. Preferably n is 1-2 and X is chloro.

The tectosilicates derivatized in this manner are first
5 dealuminated so as to produce the requisite reactive sites in the siliceous lattice, preferably by treatment with aqueous mineral acid. They are then dehydrated so as to expose these reactive sites. Although all tectosilicates may include some incidental
10 structural hydroxyl (OH) groups, not enough hydroxyls are present to allow chemical derivatization to the extent necessary to impart useful degree of hydrophobicity. Accordingly, the substrate tectosilicates must first be treated to increase the
15 number of lattice hydroxyl groups, and should then be dehydrated to make the hydroxyl groups available for subsequent chemical derivatization.

The general reaction scheme for the method of this invention may be depicted as outlined in Figure 1.
20 Replacement of the metal cation (M^+) of tectosilicates by hydronium ion is easily accomplished by exposure of tectosilicates to aqueous acid. As outlined in Fig. 1, a Si-O-Al bond of starting material I readily protonates and dissociates to provide aluminum-associated hydroxyl
25 sites within the lattice as shown by structure II. Kerr (U.S. Pat. No. 3,682,996) has disclosed the silylation of type II sites, i.e., by exposure to trimethylsilane ($HSi(CH_3)_3$) to form silylated, aluminum-containing materials of structure III. Kerr disclosed that type
30 III silylated zeolites absorbed about 40% less cyclohexane, n-hexane and water than the parent "hydrogen" zeolites of type II. However, Kerr does not report any change in selectivity preference.

Aluminous tectosilicates having a silicon to aluminum

ratio (Si:Al) of greater than about 5 can be almost totally dealuminated without loss of lattice integrity. See R.M. Barrer and M.B. Makki, Can. J. Chem., 42, 1481 (1964). This has been accomplished by extended
5 treatment of aluminous tectosilicates with aqueous acid. Dealumination is thought to afford tectosilicates having tetracoordinated hydroxylated nests comprising about 4 associated Si-OH moieties, as depicted in structure IV. These aluminum-free sites may be termed "exocaluminum
10 sites".

Activated tectosilicate materials both of structures II and IV would be expected to exhibit reduced hydrophilicity due to absolute reduction of lattice charge due to aluminum removal, but would still be
15 expected to sorb water via hydrogen bonding to hydrogen atoms associated with the remaining aluminum atoms and/or to the free silyl hydroxyl (SiOH) groups. Heating aluminum-containing or dealuminated tectosilicates to relatively low temperatures, i.e., to
20 about 100-200°C, preferably in the presence of a vacuum, clears pores and channels for absorption by removing water of hydration from the pores. Exposure of dealuminated tectosilicates to higher temperatures, i.e., to about 400-500°C, causes either partial or total
25 destruction of the hydroxyl nests, via dehydroxylation and formation of new Si-O-Si bonds. N.Y. Chen in J. Phys. Chem., 80, 60 (1976) has reported that dealuminized mordenites having Si:Al ratios of greater than 80 will not absorb water vapor at a pressure of one
30 or 12 mm of mercury.

An early attempt to replace lattice aluminum with silicon by reaction of the nests with silane was unsuccessful. See R.M. Barrer and J.-C. Trombe, J.C.S. Faraday I, 74, 1871 (1978), who also reported the
35 likelihood of some nest silylation to form a

8


tectosilicate of structure V ($R = SiH_3$, $x < 4$). They also reported that nest hydroxyl groups appeared to be less reactive to silylation than are the hydroxyl groups present in structure II of Fig. 1. The hydrophilicity of the silylated tectosilicates was not determined.

The aluminous tectosilicates utilized as starting materials in the present invention can include crystalline, amorphous and mixed crystalline amorphous tectosilicates of natural or synthetic origin or mixtures thereof. The water insoluble crystalline tectosilicates useful in the present invention are those that possess interstitial channels of a narrowest diameter of about 3-13Å. Hereinafter this diameter will be referred to as pore size. A preferred pore size characterizing the underivatized substrate materials useful in this invention is about 3-10Å, most preferably 4-8Å. The pore size of any given tectosilicate must be large enough to admit derivatization materials such as silanes, alcohols and the like, yet small enough to prohibit entry of unwanted liquid or gas stream components, i.e., aromatics, ketones, heterocyclic compounds and the like. Tectosilicates possessing pore sizes within the range of about 4-13Å readily admit small gaseous elements and compounds such as water (kinetic diameter [σ] 2.65Å), carbon monoxide (σ= 3.76Å), carbon dioxide (σ= 3.30Å) and ammonia (σ= 2.60Å).

The most useful aluminous tectosilicate starting materials preferably will possess a lattice silicon to aluminum ratio of greater than about 5:1. Tectosilicates having a silicon to aluminum ratio of less than about five tend to lose their structural integrity upon dealumination.


An especially preferred class of aluminous tectosilicate

starting materials is the naturally-occurring clinoptilolites. These minerals typically have the unit cell structure:



- 5 wherein the sodium ion content (Na⁺) may be partially replaced by calcium, potassium and/or magnesium, etc. The silicon:aluminum ratio in preferred varieties is greater than 5 and most preferably greater than about 8. The pore size is in the range of about 4.0-6.0Å.
- 10 Clinoptilolite is stable in air to about 700°C and maintains its structural integrity upon dealumination.

Other naturally-occurring aluminous tectosilicates that are useful as starting materials are the mordenites, which typically exhibit the unit cell composition:



- wherein calcium and potassium cations may replace a part of the sodium cations. The pore size is in the range of about 3.5-4.5Å. The silicon to aluminum ratio is generally greater than 5.0 and may be greater than 10 in
- 20 some samples. Other aluminous tectosilicates such as ferrierite or erionite would also provide useful starting materials.

- Although naturally-occurring aluminous tectosilicates are the preferred starting materials due to their low
- 25 cost and accessibility in large quantities, the synthetic analogs of the natural tectosilicates and their derivatives would be of equivalent utility in the present method. For example, synthetic mordenite (Zeolon®), available from the Norton Company, would be
- 30 an acceptable starting material for use in the present invention. Also, other synthetic, porous tectosilicates

10

which have no equivalent in nature could serve as acceptable starting materials.

The formation of the hydrophobic materials of the present invention normally will proceed in three steps:

- 5 (1) dealumination, (2) dehydration and (3) derivatization with an appropriate alkylating, acylating or silylating agent.

The dealumination of aluminous tectosilicates with acid is well known in the art. For example, R.M. Barrer and
10 M.B. Makki in Canadian J. Chem., 42, 1481 (1964) reported the complete dealumination of clinoptilolite by refluxing samples in aqueous hydrochloric acid of varying concentration. In the present method, a strong acid treatment is preferred, involving exposing
15 pulverized, sieved aluminous tectosilicate to refluxing, i.e. boiling 2-10N aqueous mineral acid for about 1-3 hours. The preferred acid is about 3-7N hydrochloric acid, although other strong acids such as sulfuric acid, nitric acid or phosphoric acid may be useful in some
20 cases.

In some cases, a mild acid treatment involving the percolation of aqueous acid through a column of crushed aluminous tectosilicate under ambient conditions has been found to be satisfactory. Preferably, the
25 tectosilicate starting material will be dealuminated to a Si:Al ratio of greater than about 25, preferably the ratio will exceed 100, e.g. about 150-300, and under the most preferred conditions essentially no lattice aluminum will be retained, as measured by x-ray
30 fluorescence.

The dealuminated, air-dried tectosilicate materials are then heated in order to remove most of the pore water of hydration and to expose the remaining lattice hydroxyl

groups to derivatization. The heating can be carried out at any temperature sufficient to effect substantial dehydration without causing significant lattice rearrangement and subsequent loss of reactive sites.

5 Typically the dealuminated materials are heated to about 100-200°C for about 10-40 hours, preferably under reduced pressure. Investigation of the effects of high temperatures, i.e., of 500-600°C on tectosilicates that had been subjected to the acid treatment at ambient

10 temperatures indicated that, although substantial hydrophobicity was exhibited by the samples relative to the starting materials, the derivatization did not cause a further increase in hydrophobicity.

Following thermal dehydration at lower temperatures, e.g., about 100-200°C, the dealuminated, dehydrated materials are allowed to cool and then are exposed to derivatizing reagents that react so as to functionalize the internal lattice silyl-hydroxyl groups, the majority of which are thought to be present in tetracoordinated

20 nests of the unit structure IV, as depicted in Figure 1. After exposure of the aluminum-free sites ("exoaluminum sites") to the derivatizing reagent, the nest sites will contain from about 1-4 [Si-OR] units wherein R is alkyl, acyl, or silyl substituted with 1-3 halogen,

25 alkoxy alkyl, aryl, aralkyl or cycloalkyl substituents wherein the alkyl, alkoxy or acyl groups, either directly attached to the lattice silyloxy or bound to the silicon atom of the R group, preferably are C₁-C₄ alkyl, alkoxy or acyl groups.

30 Reagents (RX) useful to replace the hydrogen atom of the nest silyl-hydroxyl groups with the substituent R include a wide range of the reagents known in organic chemistry to be useful to alkylate, acylate or silylate hydroxyl groups. Such agents are generally disclosed by

35 I.T. Harrison et al. in Compendium of Organic Synthetic

Methods, Wiley-Interscience, N.Y. (1971) at pages 124-131, the disclosure of which is incorporated by reference herein. Preferred reagents include the lower- C_1-C_4 -alkanols or C_1-C_4 alkyl halides such as methanol, ethanol and the like or methyl chloride, methyl iodide, ethyl chloride, butyl bromide and the like. Lower- C_1-C_4 -alkanols have been found to be especially effective as derivatizing agents when thermally reacted with the tectosilicates under pressure either neat or in the presence of catalysts. Other useful alkylating reagents include the C_1-C_4 -diazalkanes.

Nest hydroxyl groups may be acylated by exposure to ketenes such as ketene itself or to alkyl or dialkyl ketenes such as dimethylketene. Reaction of a silylhydroxyl group with ketene affords an SiOR moiety wherein R is acetyl, while reaction with dimethylketene introduces R as dimethylacetyl.

A wide variety of silylation reagents may be used to introduce substituted silyl substituents into the tectosilicate nests, i.e., to introduce R as $[Si(R')_n X_p]$ wherein n is 0-3, p is (3)-(n), R' is selected from the group consisting of C_1-C_4 lower alkyl, C_5-C_7 cycloalkyl, aryl, C_1-C_4 -acyl, aralkyl and mixtures thereof; and X is a halogen atom, i.e., Cl, F, I, Br or mixtures thereof, or a (lower) alkoxy group.

Di-, tri- or tetrafunctional silylation reagents may also react with 2-4 $=Si-OH$ groups in a single nest to functionally replace the missing aluminum atom with the bridging unit $SiR'q$, wherein q is 0-2, thus bridging the aluminum-deficient site with 1-2 silicon atoms. This reaction would occur via the elimination of 2-4 HX groups and the formation of O-Si-O bridges. For example, when dimethyldichlorosilane is reacted with

lattice silyl hydroxyl groups¹³ ($\equiv\text{Si}-\text{OH}$), structural units such as $\equiv\text{SiOSi}(\text{CH}_3)_2\text{Cl}$ or $\equiv\text{SiOSi}(\text{CH}_3)_2\text{OSi}$ may be introduced into the nests. Of course, the methyl groups may be replaced with any of the groups represented by R' and Cl may be replaced by another halogen atom or by an alkoxy group.

Typical monofunctional silylating reagents which introduce $\text{Si}(\text{R}')_3$ units include trimethylchlorosilane, trimethylfluorosilane, dimethylisopropylchlorosilane and the like. Preferred difunctional silylating agents include the dihalodialkylsilanes, e.g., dichlorodimethylsilane and the dialkoxy(dialkyl)silanes, e.g., diethoxydimethylsilane. Tri- and tetrafunctional silanes may also be employed to derivatize the tectosilicates of the present invention, such as silicon tetrafluoride, tetrachlorosilane, and trifluoromethylsilane.

Reaction of the dealuminated, dehydrated tectosilicates with the silylation reagent may be carried out by contacting the materials with the reagent in the liquid or gas phase. Preferably, an excess of silylation reagent in a suitable solvent is slurried with the tectosilicate. Heating and/or added catalysts may be employed if necessary, depending on the reactivity of the tectosilicate and the silane.

Gaseous hexamethyldisilazane can be reacted with lattice hydroxyl groups to introduce trimethylsilyl groups into the nests, following the procedure of Fenimore et al., Anal. Chem., **48**, 2289 (1976), the disclosure of which is incorporated herein by reference.

The methods of the present invention readily afford hydrophobic microporous, crystalline silaceous materials which exhibit a greatly reduced affinity for water while

14

maintaining high affinities for less polar molecules such as ammonia. The hydrophobicity or reduction in hydrophilicity of a tectosilicate can be quantitated in terms of its absorption of water per unit of tectosilicate under a given set of exposure conditions (retention volume). That any observed reduction in water retention is due to hydrophobicity as opposed to a general reduction in retention can be established by measuring the retention of a similarly-sized molecule of comparable or lesser polarity, such as ammonia, nitrogen, methane or carbon dioxide. By the use of these general techniques, the derivatization methods of the present invention provide microporous crystalline siliceous materials that exhibit an affinity for water vapor as measured in terms of retention (ml of H_2O /g of material at STP), which is reduced an additional 10-50%, preferably about 15-45% under the absorption capacity observed prior to the derivatization step but after the tectosilicates have been acid treated and activated toward derivatization by heating. When ammonia vapor retention is used as a reference, the absorption of water vapor into the derivatized material is no more than about 20-80% that of ammonia and is probably much less. In contrast, both ammonia and water are irreversibly absorbed on heat dehydrated or hydrated tectosilicate samples which have not been treated with acid or derivatized, exhibiting retention volumes of greater than 200 ml of vapor per column-gram of aluminous tectosilicate under the gas-solid chromatography conditions used to measure the retention volumes.

The invention will be further illustrated by reference to the following examples.

The following six procedures were used to modify the properties of clinoptilolite (Hector, Cal., NL

Industries).

PROCEDURE A1 - MILD ACID WASH

- The tectosilicate, i.e., clinoptilolite, was crushed in a jaw crusher, then pulverized in a Braun Pulverizer.
- 5 The pulverized material was passed through a 50-100 mesh RoTap® sieve agitator and used to fill a 2-inch diameter, 3-foot long Pyrex® tube two-thirds full. The powdered material was held in place with a glass wool plug. Forty liters of hydrochloric acid (6N) were
- 10 flowed through the packed column at a rate of about 9 ml/min. at 27°C. The acid-treated material was washed by flushing with three column volumes of distilled water, then air-dried. Clinoptilolite (Hector, Cal.) treated in this manner was light green and exhibits a
- 15 Si:Al ratio of approximately 30.

PROCEDURE A2 - STRONG ACID WASH

- The light green material (225 g) isolated from procedure A1 was placed in a 4.0 liter round bottomed flask and 2.0 l of 6N HCl was added. The slurry was heated at
- 20 reflux for 2.0 hours. A white mineral was recovered by vacuum filtration and washed repeatedly with deionized water. The Si:Al ratio of clinoptilolite treated in this manner was about 212.

PROCEDURE H1 - MILD HEAT TREATMENT

- 25 About 10 g of pulverized tectosilicate (clinoptilolite) was placed in a 250 ml beaker and heated to 150°C for 20 hours in a vacuum drying oven at less than 10 mm Hg. After vacuum heating, the material was stored at 150°C at ambient pressure.

- 30 PROCEDURE H2 - HIGH HEAT TREATMENT

16

About 10 g of pulverized tectosilicate (clinoptilolite) was placed in a quartz 250 ml beaker and heated at 550°C for 14 hours at ambient pressure, then transferred to a 150°C oven for storage at ambient pressure.

5 PROCEDURE D1 - SILYLATION

Pyridine was allowed to stand over potassium hydroxide pellets for 24 hours, then distilled from barium oxide and stored over 4Å molecular sieves. Toluene was refluxed over sodium metal for three days, then
10 distilled and stored over Linde type 4A molecular sieves. A reagent mixture of 20% pyridine, 15% dichlorodimethylsilane and 65% toluene was prepared and stored over the molecular sieves.

A 250 ml round bottomed flask equipped with magnetic
15 stirring, a reflux condenser and an argon inlet was flushed with dry argon and charged with 10 g of pulverized tectosilicate followed by addition of 100 ml of the reagent mixture described hereinabove. The resultant slurry was refluxed for 20 hours. After
20 reaction, the acid-treated tectosilicate material was isolated by filtration and washed with dry toluene and methanol. The material was refluxed for at least two hours in methanol, recovered by filtration and stored under ambient conditions.

25 PROCEDURE D2 - METHYLATION

About 5.0 g of pulverized material was placed in a steel bomb with about 50 ml of methanol. The bomb was sealed and heated to 220°C for 4-12 hours. The bomb was cooled to 25°C and the material recovered by filtration.

30 DETERMINATION OF GAS RETENTION VOLUMES

The treated, pulverized tectosilicate was vacuum-packed into a silylated glass column (0.125 inch inner diameter, 0.25 inch outer diameter) and held in by plugs of silylated glass wool. The column was inserted into the oven of a gas chromatograph. The injector port was maintained at 200°C, the detector oven at 250°C and the column maintained at an initial conditioning temperature of 45-50°C for 10-30 minutes. The detector filament current was held at 150mA and the carrier gas (He) inlet pressure was 60 psi. Gas injections (75-125 μ l) were made at 4-7 psi above ambient pressure and liquid injections were of 1-2 μ l. Water and ammonia retention volumes were measured at a column temperature of 200°C. Under these conditions, ammonia was irreversibly absorbed. Results were expressed as K (ml of gas absorbed/g of absorbent at STP).

The properties of a number of modified Hector, California clinoptilolites prepared by various combinations of the procedures described above are summarized in Table I. In all cases the procedures were performed or omitted in the order indicated. The silicon:aluminum ratios were determined by energy-dispersive x-ray spectrometry (Tracor Spectrace model 440, Tracor-Northern 2000 Analyzer) with data reduction accomplished using the program Super ML, Tracor X-Ray, Inc.

TABLE I

				Total Carbon
<u>Ex.</u>	<u>Treatment</u>	<u>K(H₂O)</u> ¹	<u>Si/Al</u>	<u>Analysis (%)</u> ⁴
30	1	none	>200	10.00
	2	A ₂ H ₁ D ₂	21	High ²
				0.28
				0.69

		18		
3	$A_2H_1D_1$	27	High ²	0.62
4	$A_2H_1D_0$	36	211.67	0.12
5	$A_1H_1D_2$	58	39.58	0.52
6	$A_1H_2D_0$	59	6.93 ³	0.30
5	7	64	32.66	0.63
	8	79	33.00	2.37
	9	93	34.43	0.38
10	10	129	33.56	0.29
	11	>200	10.82 ³	N.T.
10	12	>250	39.01	2.90
	13	>570	6.8 ³	0.36

1 ml/g at STP; K(NH₃) was >200 in all cases.

2 Lattice Al not detected in these materials.

3 Anomalous results probably due to operator error.

15 4 Galbraith Laboratories, Inc., Knoxville, Tenn.

From the results tabulated on Table I it can be generally seen that combinations of mild or strong acid washes followed by high or low temperature heating significantly increases the hydrophobicity of the tectosilicate even without a further derivatization step. The effect is most pronounced in the case of samples washed with strong acid, then heated at 150°C

19

(A₂H₁₀O Ex. 4). However, examples 3 and 2 demonstrate that a further significant increase in hydrophobicity can be attained by silylation or methylation, respectively, of this material. The total percent
5 carbon is also increased in these samples by over 400% in each case. Likewise, an increase in hydrophobicity is observed in the case of the silylation (Ex. 8) or methylation (Ex. 5) of the material of Ex. 9, which had been subjected to the mild acid wash and then to 150°C
10 heating. The greater affinity for water observed for these materials as opposed to the materials of examples 3 and 2 is thought to reflect the presence of more reactive sites, i.e., silyl nests, in the latter two materials, which had been exposed to stronger
15 dealumination conditions.

However, examples 7 and 13 indicate that no increase in hydrophobicity was observed for the material of Ex. 6 when derivatization was attempted; rather, a decrease was observed. It is thought that the failure of
20 derivatization to affect the observed hydrophobicity in the case of the material of Ex. 6 is due to the collapse of hydroxyl nests or other reactive sites formed by the initial acid wash. Furthermore, a comparison of Example pairs 8 and 7, 9 and 6 indicates that, for otherwise
25 equivalently-prepared samples, a high heat treatment (H2) results in a significantly lower carbon incorporation when either methylation or silylation is attempted. This provides further support for a mechanism involving the production and preservation of
30 activated nests following the strong acid, mild heat treatment combination. The attempted silylation (Ex. 12) of material which had been acid washed but not dehydrated (by heat) failed to increase the hydrophobicity of the material of Ex. 11, possibly due
35 to the blockage of reactive sites by water of hydration. Methylation of the same material caused a moderate

20

increase in hydrophobicity (Ex. 10).

- The hydrophobic derivatized materials of Exs. 3 and 2 also possessed no detectable lattice aluminum by x-ray fluoroscopy, a negative result also expected and
- 5 observed in the case of Silicalite® (Union Carbide). This provides confirmation that the strong acid wash conditions are effective to remove lattice aluminum and produce reactive hydroxyl-containing nests that are available for derivatization. Although removal of
- 10 lattice aluminum is, by itself, adequate to significantly increase the hydrophobicity of the clinoptilolite, and, in fact, is the major contributor to the hydrophobic properties involved, it is apparent from Examples 8, 3, 5 and 2 that the hydrophobic
- 15 properties are optimized, for this set of treatment variables, by further silylation or methylation. Significant hydrophobic effects are generally observed in both derivatized and underivatized materials when the Si:Al ratio exceeds about 25.
- 20 The hydrophobic materials prepared according to examples 8, 3, 5 and 2 would be expected to absorb significant amounts of ammonia from wet human or animal excreta, and to do so more effectively than any material employed heretofore, such as underivatized tectosilicates,
- 25 phyllosilicate clays, silica gel and the like. To this end, the new materials may be incorporated in diapers, bedpads and the like, either in vapor- or moisture-permeable compartments or distributed throughout the textile matrix. For example, in the case of a bedpad or
- 30 disposable diaper which typically consists of an absorbent core of natural or synthetic fibers, a permeable top or inner sheet and a liquid-impervious back or outer sheet, an effective amount of the new material of the instant invention can be incorporated in
- 35 the absorbent core of the disposable diaper. The amount

of ammonia-absorbent used can vary from about 1% to 50%,
preferably about 15% to 25% (based on the weight of the
diaper), depending on whether the diaper is intended for
day or night use; and on the age of the user.

- 5 Additionally, an effective amount of the new material
may be solution-coated onto a disposable diaper top
sheet, incorporated into the absorbent lining of plastic
baby pants or incorporated into cloth diapers by known
methods in the art of dispersing particulate solids into
10 fibrous substrates.

The new hydrophobic materials of this invention may also
be employed as animal litter, preferably when aggregated
into pellets, either alone or in combination with other
absorbent materials. Typical animal litter consists of
15 absorbent inorganic or organic materials such as
attapulgite, vermiculite and calcium montmorillonite
(i.e., clay), agglomerated wood dust, wood chips,
dehydrated grasses, straw, or alfalfa, fly ash and the
like. The addition of an effective amount, e.g. about
20 5-95%, preferably about 20% to 30% or more (based on
total litter weight) of the new material to these
litters will enhance the deodorizing capabilities of the
litter without substantially reducing the litter
absorbent characteristics.

- 25 The new hydrophobic materials of this invention may also
be used in filter cartridges in pipes, cigars or
cigarettes, either alone or dispersed throughout and/or
deposited on conventional tobacco smoke filtration
materials. Used in this capacity, effective amounts of
30 the new hydrophobic materials would be expected to
absorb significant amounts of carbon monoxide from the
mainstream smoke more effectively than hydrophillic
materials commonly used in smoke filters such as
cellulose, activated carbon, naturally-occurring or
35 synthetic aluminous tectosilicates and the like. For

- example, a filter can be made having a section consisting of about 10-75 mg, preferably about 40 to 50 mg of the new hydrophobic material either front of or behind the standard filter material. Additionally,
- 5 about 10-40 mg, preferably about 20 to 30 mg of the new material may be incorporated in the standard filter material itself. Likewise, effective amounts of the powdered materials of this invention could be incorporated into wrapping materials such as paper and
- 10 tobacco leaf used to shape cigarettes or cigars in order to reduce the carbon monoxide in the sidestream smoke of the burning cigar or cigarette. The amount used will depend upon the total weight, volume and composition of the wrapping material used.
- 15 While certain representative embodiments of the invention have been described herein for purposes of illustration, it will be apparent to those skilled in the art that modifications therein may be made without departing from the spirit and scope of the invention.

WE CLAIM:

1. A hydrophobic microporous crystalline tectosilicate material of regular geometry comprising aluminum-free sites in a silaceous lattice that are
5 characterized by the presence of about 1-4 associated moieties of the formula $\equiv\text{SiOR}$ wherein R is a substituent that is a weaker point electric source than aluminum.
2. The material of claim 1 wherein R is a substituent
10 that is a weaker point electric source than a hydroxyl group.
3. The material of claim 2 wherein R is a substituent selected from the group consisting of $\text{C}_1\text{-C}_4$ alkyl, $\text{C}_1\text{-C}_4$ acyl, and $\text{SiR}'_n\text{X}_p$ wherein R' is selected from
15 the group consisting of $\text{C}_1\text{-C}_4$ -alkyl, cycloalkyl, aryl, $\text{C}_1\text{-C}_4$ -acyl, aralkyl and mixtures thereof, X is a halogen atom or a (lower)-alkoxy group, n is 0-3 and p is (3)-(n).
4. The material of claim 2 wherein the aluminum-free
20 site is bridged by 1-2 of the units SiR'_q wherein q is 0-2, and wherein R' is selected from the group consisting of $\text{C}_1\text{-C}_4$ -alkyl, cycloalkyl, aryl, $\text{C}_1\text{-C}_4$ acyl, aralkyl and mixtures thereof.
5. The material of claim 3 or 4 wherein said sites are
25 created by a process comprising removing aluminum from an aluminous tectosilicate lattice.
6. The material of claim 5 wherein R is $\text{C}_1\text{-C}_4$ lower alkyl or $\text{SiR}'_n\text{Cl}$ wherein R' is $\text{C}_1\text{-C}_4$ alkyl and n is 1-2.
- 30 7. The material of claim 5 wherein the lattice Si:Al

24

ratio after aluminum removal is greater than about 25.

8. The material of claim 7 wherein the lattice is essentially aluminum-free.
9. The material of claim 1 which exhibits an absorption of water vapor which is no more than about 20-80% the absorption of ammonia vapor.
10. A method for preparing a hydrophobic microporous crystalline material of regular geometry comprising:
- (a) creating aluminum-deficient sites in the lattice of a natural or synthetic aluminous tectosilicate starting material, said sites being characterized by the presence of about 4 associated $\equiv\text{SiOH}$ moieties;
 - (b) heating the aluminum-deficient tectosilicate to remove water of hydration;
 - (c) reacting the $\equiv\text{Si-OH}$ moieties with a derivatizing reagent whereby about 1-4 of said moieties per site are converted to a moiety of the formula $\equiv\text{SiOR}$ wherein R is a substituent which is a weaker point electric source than aluminum.
11. The method of claim 10 wherein R is a substituent selected from the group consisting of $\text{C}_1\text{-C}_4$ alkyl, $\text{C}_1\text{-C}_4$ acyl and $\text{SiR}'_n\text{X}_p$ wherein R' is selected from the group consisting of cycloalkyl, aryl, acyl, alkyl, aralkyl and mixtures thereof, X is halo or (lower)alkoxy, n is 0-2 and p is (3)-(n), or whereby 2-4 of the Si-OH moieties are bridged by the unit SiR'_q wherein q is 0-2.
12. The method of claim 11 wherein reaction of two of

25

the $\equiv\text{Si}-\text{OH}$ moieties with the derivatizing agent results in the elimination of two HX molecules and the bridging of the moieties by the unit $-\text{SiR}_2-$.

13. The method of claim 11 wherein R is C_1-C_4 alkyl or
5 R' is C_1-C_4 alkyl, n is 1-2 and X is chloro.
14. The method of claim 10 wherein the Si:Al ratio of the starting material is greater than about 5:1.
15. The method of claim 11 wherein the aluminum deficient sites are created by exposure of the
10 aluminous tectosilicate to aqueous mineral acid.
16. The method of claim 15 comprising removing essentially all of the aluminum from the aluminous tectosilicate lattice.
17. A method for decreasing the hydrophilicity of a
15 tectosilicate material comprising:
- (a) removing a substantial portion of the aluminum from the lattice sites of an aluminous tectosilicate to create aluminum deficient sites characterized by about 4 associated
20 $\equiv\text{SiOH}$ moieties;
 - (b) dehydrating the aluminum-deficient tectosilicate at a temperature at which the integrity of the lattice is retained; and
 - (c) reacting the $\equiv\text{SiOH}$ moieties with a
25 derivatizing reagent selected from the group consisting of dihalodialkylsilanes, dialkoxydialkylsilanes, C_1-C_4 -alkanols and C_1-C_4 alkylhalides whereby about 1-4 of said moieties per site are converted to a moiety of the formula:

30




26

wherein R is selected from the group consisting of C_1-C_4 alkyl or SiR_2X wherein X is a halogen atom; or whereby at least two $\equiv SiOH$ moieties per site are bridged by the unit SiR'_q wherein q is 0-2.

- 5
18. The method of claim 17 wherein the derivatizing agent is dichlorodimethylsilane or methanol.
19. The method of claim 17 wherein the starting material is a clinoptilolite.
- 10 20. A diaper comprising an absorbent inner core which comprises an effective amount of the material of claim 1.
- 15 21. A bedpad comprising an absorbent inner core which comprises an effective amount of the material of claim 1.
22. Animal litter comprising an effective amount of the material of claim 1.
23. A cigarette or pipe filter comprising the hydrophobic material of claim 1.
- 20 24. The filter of claim 23 comprising about 40-50 mg of the hydrophobic material.
25. A cigarette or cigar wrapping comprising the material of claim 1.

1/1

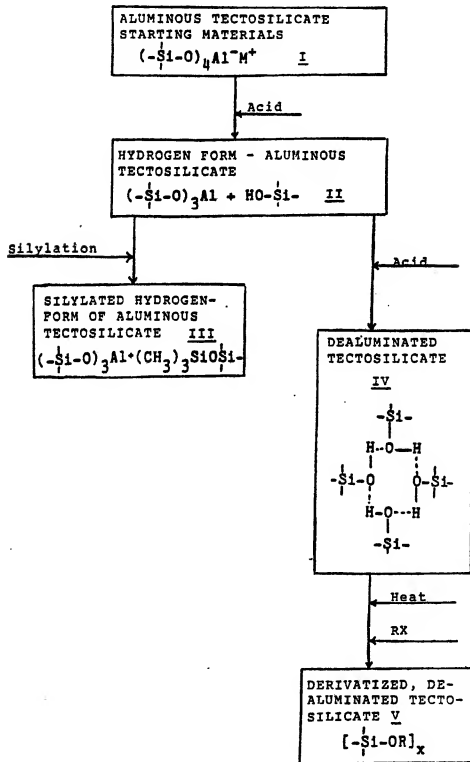FIG 1. DERIVATIZATION OF TECTOSILICATES

INTERNATIONAL SEARCH REPORT

International Application No PCT/US84/02087

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ¹			
According to International Patent Classification (IPC) or to both National Classification and IPC			
Int Cl ³ C07F 7/02			
US Cl 260/448R			
II. FIELDS SEARCHED			
Minimum Documentation Searched ⁴			
Classification System	Classification Symbols		
US	260/448R 131/331 604/360		
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁶			
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴			
Category ⁸	Citation of Document, ¹⁵ with Indication, where appropriate, of the relevant passages ¹⁷		Relevant to Claim No. ¹⁸
A	US, A, 2,911,386	03 November 1959 OLSON et al	1-25
A	US, A, 3,488,368	06 January 1970 SPIVACK	1-25
A	US, A, 3,507,897	21 April 1970 KANNER et al	1-25
A	US, A, 4,151,189	24 April 1979 RUBIN et al	1-25
A	US, A, 4,157,978	12 June 1979 LLENADO	1-25
<p>[*] Special categories of cited documents: ¹⁶</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"G" document member of the same patent family</p>			
IV. CERTIFICATION			
Date of the Actual Completion of the International Search ²		Date of Mailing of this International Search Report ³	
06 March 1985		12 MAR 1985	
International Searching Authority ¹		Signature of Authorized Officer ²⁰	
ISA/US		V. Millu Vincent Millu	